



STAINLESS STEEL SR Range



Corrosion Resistant

Reelcare's range of high quality stainless steel hose reels will increase the life of expensive wash down, chemical, and fluid transfer hoses. By properly storing your hose on Reelcare's range of stainless steel hose reels, you will be reducing the risk of tripping accidents caused by improper hose handling. Stainless steel hose reels are ideal for food processing, pre-rinse, wash down, chemical transfer and industrial solvent handling. They are also suitable for coastal, offshore oil industry, on-board ship and other marine applications where the harsh environment of salt water spray requires the use of stainless steel hose reels.



| MODELS | I.D. | | O.D. | LENGTH | | PRESSURE | | CONNECTION | APRX WGT | DIMENSIONS | | |
|--|--------------|-----|------|--------|-----|----------|------|------------|----------|------------|-----|-------|
| | without hose | mm | | inch | mm | m | ft | | | Bar | PSI | inlet |
| Spring Rewind - Low Pressure Stainless Steel | | | | | | | | | | | | |
| 5600 OLS70 | 10 | 3/8 | 18 | 11 | 35 | 35 | 500 | 3/8 | 10 | 152 | 348 | 368 |
| 7800 OLS70 | 12 | 1/2 | 21 | 15 | 50 | 35 | 500 | 1/2 | 20 | 178 | 483 | 514 |
| 82000 OLS70 | 12 | 1/2 | 21 | 30 | 100 | 35 | 500 | 1/2 | 37 | 267 | 610 | 645 |
| 83000 OLS70 | 19 | 3/4 | 31 | 15 | 50 | 35 | 500 | 3/4 | 37 | 267 | 610 | 645 |
| D83000 OLS70 | 19 | 3/4 | 31 | 23 | 75 | 35 | 500 | 3/4 | 40 | 362 | 613 | 645 |
| D84000 OLS70 | 25 | 1 | 35 | 15 | 50 | 35 | 500 | 1 | 40 | 362 | 613 | 645 |
| D9200 OLS70 | 12 | 1/2 | 21 | 30 | 100 | 35 | 500 | 1/2 | 52 | 420 | 664 | 667 |
| D9300 OLS70 | 19 | 3/4 | 31 | 23 | 75 | 35 | 500 | 3/4 | 53 | 420 | 664 | 667 |
| D9400 OLS70 | 25 | 1 | 35 | 15 | 50 | 35 | 500 | 1 | 53 | 420 | 664 | 667 |
| Spring Rewind - Medium Pressure Stainless Steel | | | | | | | | | | | | |
| 5600 OMS70 | 10 | 3/8 | 18 | 9 | 30 | 210 | 3000 | 3/8 | 11 | 152 | 348 | 368 |
| 7600 OMS55 | 10 | 3/8 | 19 | 18 | 60 | 210 | 3000 | 3/8 | 19 | 178 | 483 | 514 |
| 7800 OMS70 | 12 | 1/2 | 22 | 15 | 50 | 210 | 3000 | 1/2 | 21 | 178 | 483 | 514 |
| 82000 OMS70 | 12 | 1/2 | 22 | 23 | 75 | 104 | 1500 | 1/2 | 37 | 267 | 610 | 645 |
| 83000 OMS70 | 19 | 3/4 | 31 | 15 | 50 | 104 | 1500 | 3/4 | 37 | 267 | 610 | 645 |
| D9300 OMS70 | 19 | 3/4 | 31 | 15 | 50 | 210 | 3000 | 3/4 | 54 | 420 | 664 | 667 |




STAINLESS STEEL SE Range



| MODELS | I.D. | | O.D. | LENGTH | | CONNECTION | | WEIGHT | MODEL | APPROX WGT | DIMENSIONS | | | |
|--|-----------|----|------|--------|----|------------|-----|--------|-------|------------|------------|--------|-----------|--------------|
| | with hose | mm | | inch | mm | m | ft | | | | inlet | outlet | with hose | without hose |
| Low Pressure Air & Cold Water - 20 Bar | | | | | | | | | | | | | | |
| SE302-11 | | 10 | 3/8 | 16 | 12 | 40 | 3/8 | 3/8 | 10 | SE302-10 | 8 | 186 | 365 | 355 |
| SE352-11 | | 10 | 3/8 | 16 | 18 | 60 | 3/8 | 3/8 | 12 | SE352-10 | 10 | 186 | 410 | 400 |
| SE352-12 | | 10 | 3/8 | 14.5 | 20 | 66 | 3/8 | 3/8 | 15 | SE352-10 | 10 | 186 | 410 | 400 |
| SE432-11 | | 12 | 1/2 | 20 | 15 | 50 | 1/2 | 1/2 | 19 | SE432-10 | 14 | 186 | 460 | 450 |
| SE432-13 | | 10 | 3/8 | 16 | 18 | 60 | 1/2 | 3/8 | 21 | SE432-10 | 14 | 186 | 460 | 450 |
| SE532-11 | | 12 | 1/2 | 20 | 20 | 66 | 1/2 | 1/2 | 30 | SE532-10 | 19 | 203 | 560 | 550 |
| SE532-12 | | 12 | 1/2 | 20 | 25 | 82 | 1/2 | 1/2 | 35 | SE532-10 | 19 | 203 | 560 | 550 |
| SE542-12 | | 19 | 3/4 | 27 | 20 | 66 | 1/2 | 3/4 | 35 | SE542-10 | 24 | 300 | 573 | 550 |
| SE542-13 | | 25 | 1 | 32 | 15 | 50 | 1 | 1 | 40 | SE542-10 | 24 | 300 | 573 | 550 |
| SE562-11 | | 19 | 3/4 | 32 | 30 | 100 | 1 | 3/4 | 65 | SE562-10 | 30 | 488 | 578 | 522 |
| SE562-15 | | 25 | 1 | 35 | 30 | 100 | 1 | 1 | 70 | SE562-10 | 30 | 488 | 578 | 522 |
| Air, Hot Water & Oil 130 °C Medium Pressure - 100 Bar | | | | | | | | | | | | | | |
| SE302-21 | | 10 | 3/8 | 17 | 12 | 40 | 1/2 | 3/8 | 12 | SE302-40 | 8 | 186 | 365 | 355 |
| SE302-22 | | 12 | 1/2 | 21 | 8 | 26 | 1/2 | 1/2 | 13 | SE302-40 | 8 | 186 | 365 | 355 |
| SE352-21 | | 10 | 3/8 | 17 | 17 | 65 | 1/2 | 1/2 | 16 | SE352-40 | 10 | 186 | 410 | 400 |
| SE352-23 | | 12 | 1/2 | 21 | 10 | 35 | 1/2 | 1/2 | 13 | SE352-40 | 10 | 186 | 410 | 400 |
| SE432-21 | | 12 | 1/2 | 19 | 10 | 35 | 1/2 | 1/2 | 21 | SE434-20 | 14 | 186 | 460 | 450 |
| SE432-22 | | 12 | 1/2 | 19 | 15 | 50 | 1/2 | 1/2 | 23 | SE434-20 | 14 | 186 | 460 | 450 |
| SE532-21 | | 12 | 1/2 | 21 | 20 | 66 | 1/2 | 1/2 | 30 | SE534-20 | 19 | 203 | 560 | 550 |
| SE532-22 | | 12 | 1/2 | 21 | 25 | 82 | 1/2 | 1/2 | 32 | SE534-20 | 19 | 203 | 560 | 550 |
| SE542-22 | | 19 | 3/4 | 27 | 15 | 50 | 1 | 3/4 | 45 | SE544-20 | 24 | 300 | 573 | 550 |
| SE542-21 | | 25 | 1 | 31 | 15 | 50 | 1 | 1 | 48 | SE544-20 | 24 | 300 | 573 | 550 |
| SE562-23 | | 19 | 3/4 | 27 | 40 | 130 | 1 | 3/4 | 68 | SE564-20 | 30 | 488 | 578 | 522 |
| SE562-25 | | 25 | 1 | 35 | 30 | 100 | 1 | 1 | 72 | SE564-20 | 30 | 488 | 578 | 522 |
| Hot Water 130 °C High Pressure - 200 Bar | | | | | | | | | | | | | | |
| SE432-31 | | 10 | 3/8 | 17 | 12 | 40 | 3/8 | 3/8 | 20 | SE434-30 | 14 | 186 | 460 | 450 |
| SE432-32 | | 10 | 3/8 | 17 | 18 | 60 | 3/8 | 3/8 | 23 | SE434-30 | 14 | 186 | 460 | 450 |
| SE532-31 | | 10 | 3/8 | 17 | 25 | 82 | 3/8 | 3/8 | 38 | SE534-30 | 24 | 203 | 560 | 550 |
| SE532-32 | | 10 | 3/8 | 17 | 20 | 66 | 3/8 | 3/8 | 36 | SE534-30 | 24 | 203 | 560 | 550 |
| SE542-31 | | 10 | 3/8 | 17 | 30 | 100 | 3/8 | 3/8 | 50 | SE544-30 | 25 | 300 | 573 | 550 |
| SE562-31 | | 10 | 3/8 | 17 | 40 | 130 | 3/8 | 3/8 | 75 | SE564-30 | 38 | 488 | 578 | 522 |
| SE562-32 | | 10 | 3/8 | 17 | 50 | 160 | 3/8 | 3/8 | 80 | SE564-30 | 38 | 488 | 578 | 522 |

Also available for 400 Bar, please call for details

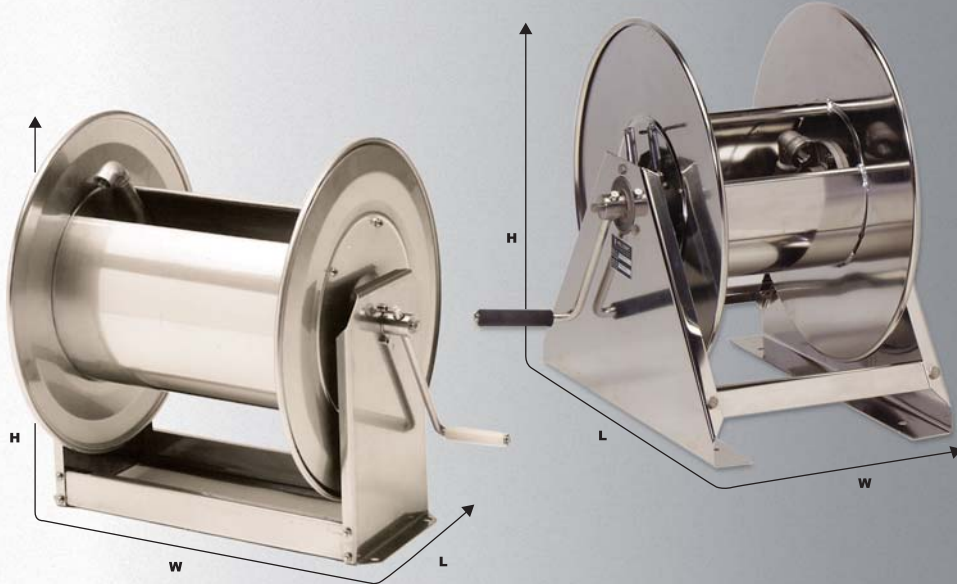

STAINLESS STEEL

STK & SR Range



STK manual rewind reels

The STK Series of manual direct crank reels are made from high quality stainless steel. The reel has many features that provide a high quality reel with smooth maintenance free operation in harsh environments.

HS Series manual rewind reels

Engineered from high grade 304 stainless steel, the HS Series are extremely rugged reels. Suitable for chemical transfer, caustic wash down, solvent handling, and marine applications where salt spray is harsh.

| MODELS without hose | I.D. | | O.D. m | LENGTH | | PRESSURE | | CONNECTION inlet | WEIGHT without hose | DIMENSIONS | | |
|---|------|------|-----------|--------|-----|----------|------|---------------------|------------------------|------------|-----|-----|
| | mm | inch | | m | ft | Bar | PSI | | | W | L | H |
| STK Series - Medium & Low Pressure Stainless Steel | | | | | | | | | | | | |
| STKi2 20/12 | 12 | 1/2 | 22 | 35 | 115 | 200 | 2900 | 1/2 | 10.5 | 312 | 465 | 515 |
| STKi2 20/19 | 19 | 3/4 | 28 | 20 | 65 | 200 | 2900 | 3/4 | 11.7 | 312 | 465 | 515 |
| STKi2 20/24 | 24 | 1 | 35 | 15 | 50 | 100 | 1450 | 1 | 12 | 312 | 465 | 515 |
| STKi2 40/12 | 12 | 1/2 | 22 | 70 | 230 | 200 | 2900 | 1/2 | 13.5 | 512 | 465 | 515 |
| STKi2 40/19 | 19 | 3/4 | 28 | 40 | 130 | 200 | 2900 | 3/4 | 14.7 | 512 | 465 | 515 |
| STKi2 40/24 | 24 | 1 | 35 | 33 | 110 | 100 | 1450 | 1 | 15 | 512 | 465 | 515 |
| STKi2 50/12 | 12 | 1/2 | 22 | 85 | 280 | 200 | 2900 | 1/2 | 14.6 | 612 | 465 | 515 |
| STKi2 50/19 | 19 | 3/4 | 28 | 50 | 165 | 200 | 2900 | 3/4 | 15.8 | 612 | 465 | 515 |
| STKi2 50/24 | 24 | 1 | 35 | 43 | 140 | 100 | 1450 | 1 | 16.1 | 612 | 465 | 515 |
| STKi2 60/12 | 12 | 1/2 | 22 | 100 | 330 | 200 | 2900 | 1/2 | 15.7 | 712 | 465 | 515 |
| STKi2 60/19 | 19 | 3/4 | 28 | 60 | 200 | 200 | 2900 | 3/4 | 16.9 | 712 | 465 | 515 |
| STKi2 60/24 | 24 | 1 | 35 | 52 | 175 | 100 | 1450 | 1 | 17.2 | 712 | 465 | 515 |
| STKi2 70/12 | 12 | 1/2 | 22 | 115 | 380 | 200 | 2900 | 1/2 | 16.8 | 812 | 465 | 515 |
| STKi2 70/19 | 19 | 3/4 | 28 | 70 | 230 | 200 | 2900 | 3/4 | 18 | 812 | 465 | 515 |
| STKi2 70/24 | 24 | 1 | 35 | 61 | 200 | 100 | 1450 | 1 | 18.3 | 812 | 465 | 515 |
| STKi2 80/12 | 12 | 1/2 | 22 | 130 | 425 | 200 | 2900 | 1/2 | 17.9 | 912 | 465 | 515 |
| STKi2 80/19 | 19 | 3/4 | 28 | 80 | 260 | 200 | 2900 | 3/4 | 19.1 | 912 | 465 | 515 |
| STKi2 80/24 | 24 | 1 | 35 | 70 | 230 | 100 | 1450 | 1 | 19.4 | 912 | 465 | 515 |

| MODELS without hose | I.D. | | O.D. m | LENGTH | | PRESSURE | | CONNECTION inlet | WEIGHT without hose | DIMENSIONS | | |
|--|------|------|-----------|--------|-----|----------|------|---------------------|------------------------|------------|-----|-----|
| | mm | inch | | m | ft | Bar | PSI | | | W | L | H |
| HS Series - Medium & Low Pressure Stainless Steel | | | | | | | | | | | | |
| HS18000M | 12 | 1/2 | 22 | 60 | 200 | 210 | 3000 | 1/2 | 15 | 318 | 508 | 483 |
| HS28000M | 12 | 1/2 | 22 | 90 | 300 | 210 | 3000 | 1/2 | 16 | 394 | 508 | 483 |
| HS19000M | 19 | 3/4 | 30 | 23 | 75 | 210 | 3000 | 3/4 | 16 | 318 | 508 | 483 |
| HS29000M | 19 | 3/4 | 30 | 38 | 125 | 210 | 3000 | 3/4 | 17 | 394 | 508 | 483 |
| HS37000L70 | 25 | 1 | 38 | 30 | 100 | 35 | 500 | 1 | 21 | 530 | 534 | 573 |