



80000 & D80000



SR Range

Heavy duty reel with a dual pedestal design

Reelcare's 80000 & D80000 spring retractable hose reels incorporate contemporary design and manufacturing techniques to guarantee long life and trouble free performance. To reduce maintenance and extend the working life, this reel has a unique five in one aluminium casting that comprises the main shaft, the latch & ratchet mechanism, the spring arbour and the goose neck. The all-steel frame and drum construction with baked-on polyester powder coat finish combine to produce a rugged corrosion resistant product suitable for a wide variety of heavy duty applications. A four position guide arm allows wall, floor, ceiling or pit mounting. The 80000 & D80000 come with the option of left or right hand inlet.



| MODELS | I.D. | | O.D. | LENGTH | | PRESSURE | | CONNECTION | | WEIGHT | MODELS | PRESSURE | | WEIGHT |
|--|------|------|------|--------|-----|----------|------|------------|--------|-----------|----------------|----------|------|--------------|
| with hose | mm | inch | mm | m | ft | Bar | PSI | inlet | outlet | with hose | without hose | Bar | PSI | without hose |
| Low Pressure Air & Water | | | | | | | | | | | | | | |
| 81100 OLP118 | 10 | 3/8 | 18 | 30 | 100 | 21 | 300 | 1/2 | 1/2 | 42 | 81000 OLP118 | 35 | 500 | 35 |
| 82075 OLP118 | 12 | 1/2 | 22 | 22 | 75 | 21 | 300 | 1/2 | 1/2 | 40 | 82000 OLP118 | 35 | 500 | 35 |
| 82100 OLP118 | 12 | 1/2 | 22 | 30 | 100 | 21 | 300 | 1/2 | 1/2 | 42 | 82000 OLP118 | 35 | 500 | 35 |
| 83050 OLP118 | 19 | 3/4 | 31 | 15 | 50 | 21 | 300 | 3/4 | 3/4 | 41 | 83000 OLP118 | 35 | 500 | 35 |
| D83075 OLP118 | 19 | 3/4 | 31 | 23 | 75 | 21 | 300 | 3/4 | 3/4 | 43 | D83000 OLP118 | 35 | 500 | 38 |
| D84050 OLP118 | 25 | 1 | 35 | 15 | 50 | 21 | 300 | 1 | 1 | 55 | D84000 OLP118 | 35 | 500 | 38 |
| Medium Pressure Air, Water & Oil | | | | | | | | | | | | | | |
| 82075 OMP118 | 12 | 1/2 | 21 | 22 | 75 | 86 | 1250 | 1/2 | 1/2 | 45 | 82000 OMP118 | 103 | 1500 | 35 |
| 83050 OMP118 | 19 | 3/4 | 31 | 15 | 50 | 86 | 1250 | 3/4 | 3/4 | 44 | 83000 OMP118 | 103 | 1500 | 35 |
| High Pressure Grease | | | | | | | | | | | | | | |
| 81075 OHP118 | 10 | 3/8 | 18 | 22 | 75 | 275 | 4000 | 1/2 | 3/8 | 55 | 81000 OHP118 | 345 | 5000 | 35 |
| 81100 OHP118 | 10 | 3/8 | 18 | 30 | 100 | 275 | 4000 | 1/2 | 3/8 | 58 | 81000 OHP118 | 345 | 5000 | 35 |
| High Pressure Wash Reels | | | | | | | | | | | | | | |
| PW81100 OHP118 | 10 | 3/8 | 30 | 30 | 100 | 345 | 5000 | 1/2 | 3/8 | 52 | PW81000 OHP118 | 345 | 5000 | 37 |
| DIMENSIONS 80000 W 267 mm L 610 mm H 645 mm | | | | | | | | | | | | | | |
| DIMENSIONS D80000 W 362 mm L 610 mm H 645 mm | | | | | | | | | | | | | | |

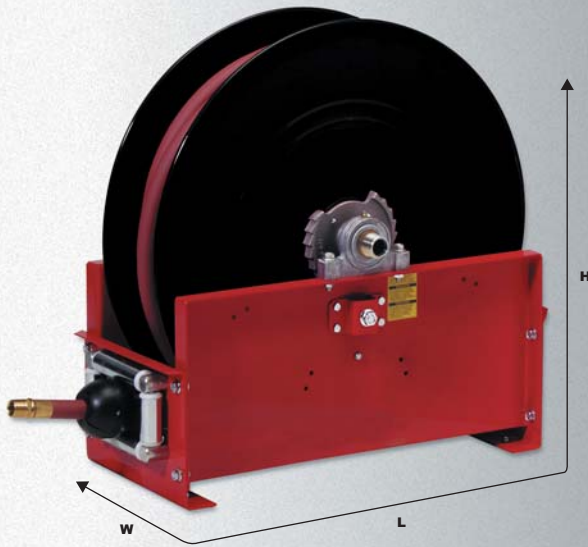

9000 | SR Range

Unique base design for maximum stability

The 9000 Series base design offers complete stability no matter what the application. The range is suitable for high volume air, water, fuel and petroleum applications. The design makes it ideal for service vehicles, permanent service or plant work areas. The standard low pressure hose reels are for air or water service only. The medium and high pressure reels are for air, water, oil and grease respectively. Consult Reelcare if you are unsure of your application, the sales department are there to help and will be more than happy to advise.

The 80000, D80000 & 9000 Series are also available in stainless steel and a variety of welding, fuel and twin hydraulic applications.



| MODELS | I.D. | | O.D. | LENGTH | | PRESSURE | | CONNECTION | | WEIGHT | MODELS | PRESSURE | | WEIGHT |
|-----------|------|------|------|--------|----|----------|-----|------------|--------|-----------|--------------|----------|-----|--------------|
| with hose | mm | inch | mm | m | ft | Bar | PSI | inlet | outlet | with hose | without hose | Bar | PSI | without hose |

Low Pressure Air & Water

| | | | | | | | | | | | | | | |
|--------------|----|-----|----|----|-----|----|-----|-----|-----|----|--------------|----|-----|----|
| D9299 OLP118 | 12 | 1/2 | 22 | 31 | 100 | 20 | 300 | 1/2 | 1/2 | 58 | D9200 OLP118 | 35 | 500 | 52 |
| D9350 OLP118 | 19 | 3/4 | 31 | 15 | 50 | 20 | 300 | 3/4 | 3/4 | 60 | D9300 OLP118 | 35 | 500 | 52 |
| D9399 OLP118 | 19 | 3/4 | 31 | 31 | 100 | 20 | 300 | 3/4 | 3/4 | 65 | D9305 OLP118 | 35 | 500 | 52 |
| D9450 OLP118 | 25 | 1 | 38 | 15 | 50 | 20 | 300 | 1 | 1 | 70 | D9400 OLP118 | 35 | 500 | 52 |

Medium Pressure Air, Water & Oil

| | | | | | | | | | | | | | | |
|--------------|----|-----|----|----|----|-----|------|-----|-----|----|--------------|-----|------|----|
| D9275 OMP118 | 12 | 1/2 | 22 | 23 | 75 | 137 | 2000 | 1/2 | 1/2 | 63 | D9200 OMP118 | 207 | 3000 | 52 |
| D9350 OMP118 | 19 | 3/4 | 32 | 15 | 50 | 86 | 1250 | 3/4 | 3/4 | 65 | D9300 OMP118 | 207 | 3000 | 52 |

High Pressure Grease

| | | | | | | | | | | | | | | |
|--------------|----|-----|----|----|----|-----|------|-----|-----|----|--------------|-----|------|----|
| D9175 OHP118 | 10 | 3/8 | 22 | 23 | 75 | 276 | 4000 | 3/8 | 1/2 | 65 | D9100 OHP118 | 345 | 5000 | 52 |
|--------------|----|-----|----|----|----|-----|------|-----|-----|----|--------------|-----|------|----|

DIMENSIONS D9000 W 400 mm L 667 mm H 667 mm