




270/300/350/430 | SE Range

Compact Duty

The SE Range of spring driven hose reels represents outstanding value for money. This is an extremely durable range of high quality steel hose reels. The 270, 300, 350 & 430 Series suit hose sizes ranging from 6mm id (1/4") up to 12mm id (1/2"). Sturdy and compact, the SE Range allows the user to manage hose safely, practically and effectively. The SE Range is available with or without hose and is suitable for numerous applications.

- ▶ Full Flow Swivel
- ▶ Adjustable Guide Arm
- ▶ Enclosed Drive Spring
- ▶ Powder Coated Steel
- ▶ Easy Installation




MODELS	MODELS	I.D.		O.D.	LENGTH		PRESSURE		CONNECTION		WEIGHT	DIMENSIONS		
with hose	without hose	mm	inch	mm	m	ft	Bar	PSI	inlet	outlet	with hose	W	L	H
	SE270-10	10	3/8	16	15	50	20	300	3/8	3/8	7	186	320	310
SE270-11		10	3/8	16	10	35	20	300	3/8	3/8	8.5	186	320	310
SE270-12		10	3/8	16	13	42	20	300	3/8	3/8	10	186	320	310
SE270-13		8	5/16	14	15	50	20	300	3/8	1/4	12	186	320	310
	SE300-10	10	3/8	16	12	40	20	300	3/8	3/8	8	186	355	365
SE300-11		10	3/8	16	12	40	20	300	3/8	3/8	10	186	355	365
	SE350-10	10	3/8	16	18	60	20	300	3/8	3/8	10	186	410	400
SE350-11		10	3/8	16	18	60	20	300	3/8	3/8	12	186	410	400
	SE430-10	12	1/2	19	15	50	20	300	1/2	1/2	14	186	460	450
SE430-11		12	1/2	19	15	50	20	300	1/2	1/2	19	186	460	450

Medium Pressure Hot Water 130°C

	SE300-20	10	3/8	16	12	40	100	1500	1/2	3/8-1/2	8	186	340	330
SE300-21		10	3/8	16	12	40	100	1500	1/2	3/8	11	186	340	330
	SE350-20	10	3/8	16	17	56	100	1500	1/2	3/8-1/2	10	186	390	380
SE350-21		10	3/8	16	17	56	100	1500	1/2	3/8	14	186	390	380
	SE430-20	12	1/2	18	15	50	100	1500	1/2	1/2	14	186	460	450
SE430-22		12	1/2	18	15	50	100	1500	1/2	1/2	21	186	460	450

High Pressure Hot Water 130°C

	SE430-30	10	3/8	16	18	60	200	3000	3/8	1/2	14	186	460	450
SE430-32		10	3/8	16	18	60	200	3000	3/8	3/8	22	186	460	450

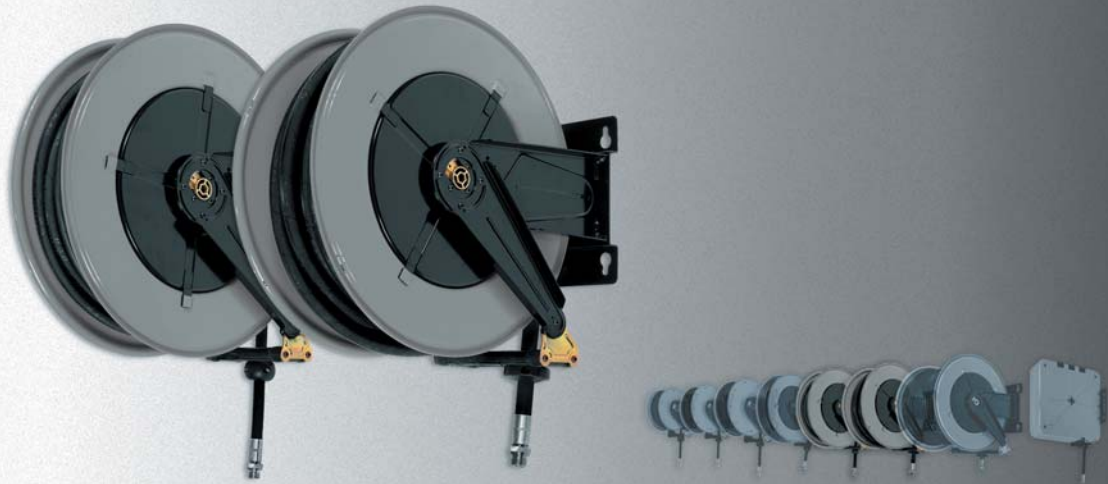


530/540

SE Range

Medium Duty

The 530 & 540 Series are extremely durable, high quality steel hose reels that will suit hose sizes ranging from 12mm id (1/2") up to 25mm id (1"). Sturdy and compact, the SE Range allows the user to manage hose safely, practically and effectively. The SE Range is available with or without hose and is suitable for numerous applications.

- ▶ Full Flow Swivel
- ▶ Adjustable Guide Arm
- ▶ Enclosed Drive Spring
- ▶ Powder Coated Steel
- ▶ Easy Installation



MODELS	MODELS	I.D.		O.D.	LENGTH		PRESSURE		CONNECTION		WEIGHT	DIMENSIONS		
with hose	without hose	mm	inch	mm	m	ft	Bar	PSI	inlet	outlet	with hose	W	L	H

Low Pressure Air & Water

	SE530-10	12	1/2	20	25	82	20	300	1/2	1/2	19	203	560	550
SE530-12		12	1/2	20	25	82	20	300	1/2	1/2	25	203	560	550
	SE540-10	19 & 25	3/4 & 1	25 & 35	20 & 15	65 & 50	20	300	1	1	24	300	560	550
SE540-12		19	3/4	25	20	66	20	300	1	3/4	35	300	560	550
SE540-13		25	1	35	15	50	20	300	1	1	37	300	560	550

Medium Pressure Hot Water 130°C

	SE530-20	12	1/2	19	25	82	100	1500	1/2	1/2	19	203	560	550
SE530-22		12	1/2	19	25	82	100	1500	1/2	1/2	32	203	560	550
	SE540-20	19 & 25	3/4 & 1	25 & 35	30 & 20	100 & 66	100	1500	1	1	24	300	560	550
SE540-23		19	3/4	25	20	66	100	1500	1	3/4	37	300	560	550
	SE540-25	12	1/2	20	30	100	100	1500	1/2	1/2	24	300	560	550
SE540-26		12	1/2	20	30	100	100	1500	1/2	1/2	38	300	560	550

High Pressure Hot Water 130°C

	SE530-30	10	3/8	18	25	82	200	3000	3/8	1/2	19	203	560	550
SE530-31		10	3/8	18	25	82	200	3000	3/8	3/8	30	203	560	550
	SE540-30	10	3/8	18	30	100	200	3000	3/8	1/2	24	300	560	550
SE540-31		10	3/8	18	30	100	200	3000	3/8	3/8	40	300	560	550