




# CABLE REELS

Gen IV

Designed for a range of industrial applications

The GEN IV cable reels are the perfect solution to ensuring cables are stored safely when not in use. When cables are left lying around they are easily damaged resulting in a potential hazard. To ensure the protection of the reel and the operator a thermal reset switch has been installed to each model. All cable reels supplied with lamps a standard plug transformer is supplied before the reel to ensure the correct voltage for the reel required.

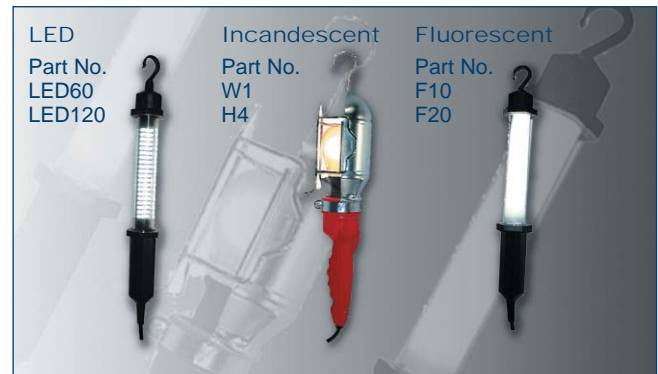

- ▶ Integral pivoting wall bracket
- ▶ Robust yet compact design
- ▶ Supplied with Inlet Cable
- ▶ Easy installation
- ▶ Supplied with fitted cable
- ▶ Full range of lamps available

MODELS With cable	CABLE mm <sup>2</sup> Cores.		LENGTH m	INPUT V/AC	OUTPUT V/AC	AMPS	CABLE	LAMP
<b>SR Range Cable Reels Supplied with Lamps</b>								
L240121510	1	2	12+1*	240 -12 V/AC Transformer	12	10	Black	W1
L240241510	1	2	12+1*	240 -24 V/AC Transformer	24	10	Black	H4
L2401215101	1	2	12+1*	240 -12 V/AC Transformer	12	10	Black	F10
L2401215102	1	2	12+1*	240 -12 V/AC Transformer	12	10	Black	LED60
L2401101510	1	2	12+1*	240 -110 V/AC Transformer	110	10	Yellow	H4

MODELS With cable	CABLE mm <sup>2</sup> Cores.		LENGTH m	INPUT V/AC	OUTPUT V/AC	AMPS	OUTLET	CABLE Colour
<b>SR Range Cable Reels Supplied without Lamps or Transformer</b>								
EL121512	1.5	3	12+1*	12	12	15	Cut	Black
EL241512	1.5	3	12+1*	24	24	15	Cut	Black
EL1101512	1.5	3	12+1*	110	110	15	Cut	Yellow
EL2401510	1	2	12+1*	240	240	10	Cut	Black
EL2401511	1	3	12+1*	240	240	10	Cut	Black
EL2401512	1.5	3	12+1*	240	240	15	Cut	Black
EL2401515	2.5	3	12+1*	240	240	15	Cut	Black

\*Supplied with 1m lead cable



# FORKLIFT REELS

SB Range

## Forklift Reels

Our reels are of modular design, and all sizes of reel are tested to 400 Bar working pressure for continuous use. The reels are designed for use with 5 / 16 " , 3 / 8 " and 1/2" simplex and duplex hose, and we can accommodate up to 35m of hose. Due to the design of our reel hub and plate, our reels can hold more hose size-for-size than any other high-quality hydraulic hose reel on the market.

Listed below are standard models, specialist reels that incorporate electrical cable into the hose can also be supplied. Please consult Reelcare for details.



MODELS	MODELS	FLANGE DIAMETER	LENGTH	LENGTH	LENGTH
Right Hand	Left Hand	mm	5/16"	3/8"	1/2"
<b>2 Port Forklift/ Mast Reels</b>					
K300R/2	K300L/2	300	4,0 m	4,0 m	2,4 m
K350R/2	K350L/2	350	6,0 m	6,0 m	3,6 m
K400R/2	K400L/2	400	8,0 m	8,0 m	5,5 m
K450R/2	K450L/2	450	10,0 m	10,00 m	7,0 m
K470R/2	K470L/2	470	11,0m	11,0 m	8,5 m
K500R/2	K500L/2	500	12,0 m	12,0 m	9,0 m
K550R/2	K550L/2	550	14,5 m	14,5 m	11,0 m
K600R/2	K600L/2	600	18,0 m	18,0 m	13,0 m
<b>4 Port Forklift/ Mast Reels</b>					
K300R/4	K300L/4	300	4,0 m	4,0 m	2,4 m
K350R/4	K350L/4	350	6,0 m	6,0 m	3,6 m
K400R/4	K400L/4	400	8,0 m	8,0 m	5,5 m
K450R/4	K450L/4	450	10,0 m	10,0 m	7,0 m
K470R/4	K470L4	470	11,0m	11,0 m	8,5 m
K500R/4	K500L/4	500	12,0 m	12,0 m	9,0 m
K550R/4	K550L/4	550	14,5 m	14,5 m	11,0 m
K600R/4	K600L/4	600	18,0 m	18,0 m	13,0 m