



WELDING


All Ranges

MODELS with hose	I.D.		O.D.	LENGTH		WEIGHT with hose	MODELS without hose	I.D.		LENGTH		WEIGHT without hose	DIMENSIONS Ref. Page
	mm	inch	mm	m	ft			mm	inch	m	ft		
SG Range - 14 Bar													
SG3450 ELOAR	6	1/4	14	15	50	15	—————						4
SG3650 ELOAR	8	5/16	16	15	50	15	—————						4
SR Range - 14 Bar													
TW5425 OLP118	6	1/4	14	7.5	25	14	TW5400 OLP118	6	1/4	7.5	25	9	10
TW7450 OLP118	6	1/4	14	15	50	26	TW7400 OLP118	6	1/4	18	60	19	12
TW7460 OLP118	6	1/4	14	18	60	27	TW7400 OLP118	6	1/4	18	60	19	12
TW84100 OLPT118	6	1/4	30	36	100	48	TW84000 OLPT118	6	1/4	30	100	36	14
TW86075 OLPT118	10	3/8	22	39	75	45	TW86000 OLPT118	10	3/8	23	75	39	14
—————							BA36106 L118	6	1/4	38	125	22	N/A
—————							BA36112 L118	6	1/4	76	250	25	N/A
SE Range - 20 Bar													
SE430-71	6	1/4	14	13	42	21	SE430-70	6	1/4	13	42	14	16
SE430-72	8	5/16	16	12	40	22	SE430-70	8	5/16	12	40	14	16
SE530-72	6	1/4	14	20	66	31	SE530-70	6	1/4	20	66	19	17
SE530-74	8	5/16	16	20	66	32	SE530-70	8	5/16	20	66	19	17
SE530-75	10	3/8	17	15	50	34	SE530-70	10	3/8	15	50	19	17
SE540-71	6	1/4	14	25	82	34	SE540-70	6	1/4	35	115	24	17
SE540-72	6	1/4	14	30	100	40	SE540-70	6	1/4	35	115	24	17
SE540-74	8	5/16	16	25	82	35	SE540-70	8	5/16	35	115	24	17
SE540-75	8	5/16	16	30	100	40	SE540-70	8	5/16	35	115	24	17
SE540-77	10	3/8	17	20	66	36	SE540-70	10	3/8	27	88	24	17
SE540-78	10	3/8	17	25	82	40	SE540-70	10	3/8	27	88	24	17

TWIN HYDRAULIC

All Ranges

MODELS with hose	I.D.		O.D.	LENGTH		WEIGHT with hose	MODELS without hose	I.D.		LENGTH		WEIGHT without hose	DIMENSIONS Ref. Page
	mm	inch	mm	m	ft			mm	inch	m	ft		
SR Range - 207 Bar													
TH5425 OMP118	6	1/4	13	7.5	25	15	TH5400 OMP118	6	1/4	8		10	10
TH7445 OMP118	6	1/4	13	14	45	30	TH7400 OMP118	6	1/4	15		22	12
TH7630 OMP118	10	3/8	16	9	30	27	TH7600 OMP118	10	3/8	9		22	12
TH86050 OMP118	10	3/8	16	15	50	45	TH86000 OMP118	10	3/8	15		39	14
TH88050 OMP118	12	1/2	23	15	50	47	TH88000 OMP118	12	1/2	15		39	14

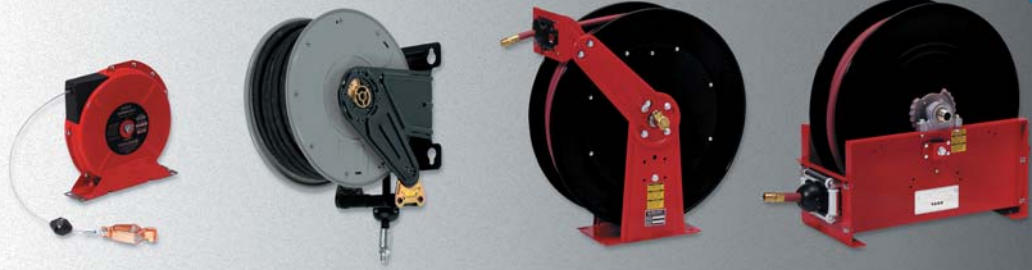

FUEL

All Ranges

MODELS with hose	I.D.		O.D.		LENGTH		WEIGHT with hose	MODELS without hose	I.D.		LENGTH		PRESSURE		WEIGHT without hose	DIMENSIONS Ref. Page
	mm	inch	mm	m	ft				mm	inch	m	ft	Bar	PSI		
SR Range - 20 Bar																
F7925 OLP118	19	3/4	31	7.5	25	24	F7900 OLP118	19	3/4	7.5	25	35	500	20	12	
F83050 OLP118	19	3/4	31	15	50	41	F83000 OLP118	19	3/4	15	50	35	500	35	14	
FD83075 OLP118	19	3/4	31	23	75	56	FD83000 OLP118	19	3/4	23	75	35	500	35	14	
FD84050 OLP118	25	1	38	15	50	54	FD84000 OLP118	25	1	15	50	35	500	35	14	
FD9350 OLP118	19	3/4	31	15	50	60	FD9300 OLP118	19	3/4	15	50	35	500	45	15	
FD9450 OLP118	25	1	38	15	50	70	FD9400 OLP118	25	1	15	50	35	500	45	15	
FF9550 OLP118	32	1-1/4	45	15	50	80	FF9500 OLPBW118	32	1-1/4	15	50	35	500	57	15	
FF9650 OLP118	38	1-1/2	51	15	50	80	FF9600 OLPBW118	38	1-1/2	15	50	35	500	57	15	

SE Range - 10 Bar

SE530-61	12	1/2	20	20	66	35	SE530-10	12	1/2	25	80	10	150	19	17
SE530-62	12	1/2	20	25	82	40	SE530-10	12	1/2	25	80	10	150	19	17
SE540-61	19	3/4	27	15	50	34	SE540-10	19	3/4	20	66	10	150	24	17
SE540-62	19	3/4	27	20	66	38	SE540-10	19	3/4	20	66	10	150	24	17
SE540-63	25	1	35	15	50	36	SE540-10	25	1	15	50	10	150	24	17
SE560-61	19	3/4	27	30	100	65	SE560-10	19	3/4	30	100	10	150	30	18
SE560-64	25	1	35	20	66	66	SE560-10	25	1	20	66	10	150	30	18

Grounding Reels

MODELS with cable	CABLE	LENGTH		WEIGHT inc. cable	DIMENSIONS		
		m	ft		W	L	H
G 3050	single 7 x 7 stranded steel cable	15	50	6	85	219	224
G 3050 N	as above, nylon covered cable	15	50	6	85	219	224
G 3050 Y	10.5 m cable + dual 4.5m for "Y"	15	50	6	85	219	224
G 3100 N	7 x 7 stranded steel cable nylon covered	30	100	10	110	235	248

PRESSURE WASH

All Ranges

MODELS with hose	I.D.		O.D.		LENGTH		WEIGHT with hose	MODELS without hose	I.D.		LENGTH		WEIGHT without hose	DIMENSIONS Ref. Page
	mm	inch	mm	m	ft				mm	inch	m	ft		
SG Range - 103 Bar														
SG3450 HPW	6	1/4	14	15	50	13								4
SG3650 HPW	10	3/8	16	15	50	13								4
SR Range - 345 Bar														
PW7650OHP118	10	3/8	18	15	50	28	PW7600 OHP118	10	3/8	15	50	22		12
PW81100OHP118	10	3/8	18	15	50	45	PW81000 OHP118	10	3/8	30	100	39		14