

4000/5000 | SR Range


Compact, durable & versatile

The 4000 & 5000 Series hose reels are durable and compact and used for a wide variety of applications where space requirements are critical. A full flow shaft and swivel assembly assures maximum product delivery. The standard low pressure hose reel is for air or water service only. The medium and high pressure reels are for oil and grease respectively.

Consult Reelcare if you are unsure of your application, the sales department are there to help and will be more than happy to advise.



MODELS	I.D.		O.D.	LENGTH		PRESSURE		CONNECTION		WEIGHT	MODELS	PRESSURE		WEIGHT
with hose	mm	inch	mm	m	ft	Bar	PSI	inlet	outlet	with hose	without hose	Bar	PSI	without hose
4000 Low Pressure Air & Water														
4420 OLP118	6	1/4	13	6	20	21	300	3/8	1/4	9	4400 OLP118	35	500	8
4425 OLP118	6	1/4	13	8	25	21	300	3/8	1/4	9	4400 OLP118	35	500	8
4435 OLP118	6	1/4	13	11	35	21	300	3/8	1/4	10	4400 OLP118	35	500	8
4617 OLP118	10	3/8	16	5	17	21	300	3/8	1/4	9	4600 OLP118	35	500	8
4625 OLP118	10	3/8	16	8	25	21	300	3/8	1/4	9	4600 OLP118	35	500	8
5000 Low Pressure Air & Water														
5450 OLP118	6	1/4	14	15	50	21	300	3/8	1/4	12	5400 OLP118	35	500	9
5635 OLP118	11	3/8	20	11	35	21	300	3/8	1/4	17	5600 OLP118	35	500	10
A5825 OLP118	12	1/2	21	8	25	21	300	3/8	1/2	14	A5800 OLP118	35	500	10
5000 Medium Pressure Air, Water & Oil														
5435 OMP118	6	1/4	15	11	35	190	2750	3/8	1/4	14	5400 OMP118	207	3000	20
5630 OMP118	10	3/8	20	9	30	155	2250	3/8	3/8	14	5600 OMP118	207	3000	21
5000 High Pressure Grease														
5430 OHP118	6	1/4	15	9	30	345	5000	1/4	1/4	14	5400 OHP118	345	5000	12
5625 OHP118	10	3/8	20	8	25	276	4000	1/4	1/4	14	5600 OHP118	345	5000	12
DIMENSIONS 4000		W 136 mm	L 321 mm	H 327 mm										
DIMENSIONS 5000		W 152 mm	L 343 mm	H 368 mm										

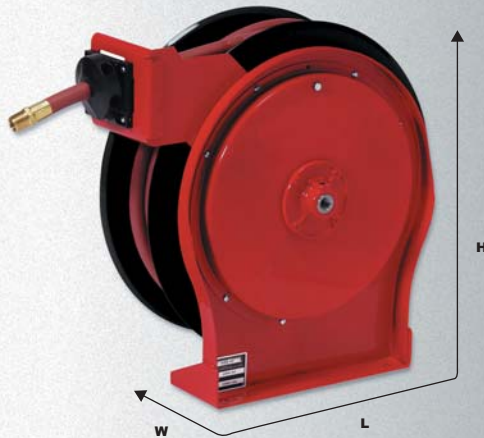

5005

SR Range

Compact, durable & versatile

The 5005 Series is similar to the 4000 and 5000 Series except it handles longer hose lengths up to 15 Metres. The quiet speed latch mechanism offers quiet operation combined with latch cam technology insuring longer latching life and trouble free performance. Reels are all-steel construction and compact for applications with critical space requirements. The medium and high pressure reels are for oil and grease respectively.

Consult Reelcare if you are unsure; the sales department are there to help and will be more than happy to advise.



- ▶ Industrial
- ▶ Automotive Centres
- ▶ Garages

- ▶ Service Vehicles
- ▶ Farms/Agricultural
- ▶ Fleet Maintenance

- ▶ Woodworking
- ▶ Work Shop
- ▶ Aircraft Maintenance

- ▶ Pneumatic Tools
- ▶ Assembly Lines
- ▶ and many more

MODELS	I.D.		O.D.		LENGTH		PRESSURE		CONNECTION		WEIGHT	MODELS	PRESSURE		WEIGHT
with hose	mm	inch	mm	mm	m	ft	Bar	PSI	inlet	outlet	with hose	without hose	Bar	PSI	without hose

5005 & 5006 Low Pressure Air & Water

5650 OLP118	10	3/8	16	15	50	21	300	3/8	1/4	12	5605 OLP118	35	500	14
A5835 OLP118	12	1/2	20	11	35	21	300	3/8	3/8	18	A5805 OLP118	35	500	15
A5850 OLP118	12	1/2	20	15	50	21	300	3/8	1/2	20	A5806 OLP118	35	500	15

5005 Medium Pressure Air, Water & Oil

A5835 OMP118	12	1/2	21	11	35	138	2000	3/8	1/2	19	A5805 OMP118	207	3000	14
--------------	----	-----	----	----	----	-----	------	-----	-----	----	--------------	-----	------	----

5005 High Pressure Grease

5435 OHP118	6	1/4	15	11	35	345	5000	1/4	1/4	19	5405 OHP118	345	5000	14
-------------	---	-----	----	----	----	-----	------	-----	-----	----	-------------	-----	------	----

DIMENSIONS 5005 W 152 mm L 419 mm H 445 mm

DIMENSIONS 5006 W 178 mm L 419 mm H 445 mm